

Co-designing Accessible Public Robots: Insights from People with Mobility Disabilities, Robotic Practitioners, and Their Collaborations

Howard Ziyu Han
ziyuh@andrew.cmu.edu
Human-Computer Interaction
Institute, Carnegie Mellon University
Pittsburgh, Pennsylvania, USA

Franklin Mingzhe Li
mingzhe2@cs.cmu.edu
Human-Computer Interaction
Institute, Carnegie Mellon University
Pittsburgh, Pennsylvania, USA

Alesandra Baca-Vazquez
alesandrabaca@utexas.edu
School of Information
University of Texas at Austin
Austin, Texas, USA

Daragh Byrne
daragh@cmu.edu
School of Architecture
Carnegie Mellon University
Pittsburgh, Pennsylvania, USA

Nikolas Martelaro*
nikmart@cmu.edu
Human-Computer Interaction
Institute, Carnegie Mellon University
Pittsburgh, Pennsylvania, USA

Sarah E Fox*
sarahfox@cmu.edu
Human-Computer Interaction
Institute, Carnegie Mellon University
Pittsburgh, Pennsylvania, USA

ABSTRACT

Sidewalk robots are increasingly common across the globe. Yet, their operation on public paths poses challenges for people with mobility disabilities (PwMD) who face barriers to accessibility, such as insufficient curb cuts. We interviewed 15 PwMD to understand how they perceive sidewalk robots. Findings indicated that PwMD feel they have to compete for space on the sidewalk when robots are introduced. We next interviewed eight robotics practitioners to learn about their attitudes towards accessibility. Practitioners described how issues often stem from robotic companies addressing accessibility only after problems arise. Both interview groups underscored the importance of integrating accessibility from the outset. Building on this finding, we held four co-design workshops with PwMD and practitioners in pairs. These convenings brought to bear accessibility needs around robots operating in public spaces and in the public interest. Our study aims to set the stage for a more inclusive future around public service robots.

CCS CONCEPTS

• **Human-centered computing** → **Accessibility**; • **Computer systems organization** → **Robotics**.

KEYWORDS

Sidewalk robots, Accessibility, Delivery robots, Public space, Human-robot interaction

ACM Reference Format:

Howard Ziyu Han, Franklin Mingzhe Li, Alesandra Baca-Vazquez, Daragh Byrne, Nikolas Martelaro, and Sarah E Fox. 2024. Co-designing Accessible

*Co-senior authors contributed equally to this research.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).
CHI '24, May 11–16, 2024, Honolulu, HI, USA
© 2024 Copyright held by the owner/author(s).
ACM ISBN 979-8-4007-0330-0/24/05.
<https://doi.org/10.1145/3613904.3642875>

Public Robots: Insights from People with Mobility Disabilities, Robotic Practitioners, and Their Collaborations. In *Proceedings of the CHI Conference on Human Factors in Computing Systems (CHI '24)*, May 11–16, 2024, Honolulu, HI, USA. ACM, New York, NY, USA, 20 pages. <https://doi.org/10.1145/3613904.3642875>

1 INTRODUCTION

Alongside the widening use of service robots generally, sidewalk robots are among the newest innovations to be introduced into public spaces [12, 60, 80]. Several companies such as FedEx, Starship, and Uber Eats are currently testing or deploying robots designed to deliver food, medicine, and other small cargo [5]. Although there are few public deployments of robots on sidewalks, some states have proactively prepared legislation to allow more widespread use of the technology; Pennsylvania, for instance, recently defined delivery robots as “pedestrians” under state law, ostensibly giving them the same legal rights as human residents. Further, regulations allow the robots to travel at speeds up to 12 miles per hour and weigh 500 pounds unloaded [4]. However, when sidewalk robots navigate pedestrian walkways, most people they interact with will not be users of the robot, but are instead non-users who “happen to be there” [60]. Among those passersby will be people with mobility disabilities (PwMD)—such as wheelchair users—whose needs should be considered in any debate or development of such devices that operate in public [12]. Yet, ongoing studies have revealed conflicts between PwMD and sidewalk robots [7, 12, 13, 33, 80]. Drawing on interviews with multiple stakeholders, including disability advocates, company representatives, and city government officials, Bennett et al. [12] found that sidewalk robots can re-introduce access barriers long fought against by the disability rights community [52]. Additionally, the second author on [12], a wheelchair user, experienced a dangerous encounter with a sidewalk robot that stopped on a curb cut, blocking her safe passage to the other side of the road. After sharing a Tweet recounting the experience [7], the company removed the robot from operating in public for a brief time. However, she received backlash for “whining”, given that she “was not hit by a car”. This incident—and subsequent responses—highlights a clear knowledge gap around PwMD’s interactions with

sidewalk robots and the need to maintain accessible public walkways.

Given these prior incidents and the potential for harm, the needs of PwMD are critical to consider when designing robots that travel on public sidewalks. However, aside from a limited number of research studies [6], accessible sidewalk robot interactions are often under-considered. To understand why, it is necessary to recognize the ways design decisions shape how robots are (or are not) embedded with accessibility features and are later integrated into society. For example, how practitioners acknowledge and incorporate PwMD's needs throughout the design and deployment process dictates the safety and societal implications of these robots. While much prior work in accessible Human-Robot Interaction (HRI) has engaged roboticists in co-design activities with people with disabilities (PwD) [8, 26, 45, 75], few works reflect on the organizational practices that guide how robotics practitioners value, evaluate, and ensure accessibility when developing robots for public space.

This paper aims to understand the complex relationship between sidewalk robots and PwMD in order to inform the design and operation of these robots in a safe and socially responsible way. To this end, we pose the following research questions:

- **RQ1:** How do PwMD perceive the presence of robots on public walkways? How do they imagine encountering and interacting with these robots, given different HRI design factors and different environmental constraints?
- **RQ2:** How do roboticists in industry and academia view the challenges raised by PwMD? What are the obstacles to and opportunities for improving their current practices in order to design future public robots that are more accessible?
- **RQ3:** How might robotics practitioners and PwMD conceptualize and prototype public robots together? How might the ideas and accessibility needs, in turn, inform current HRI practice?

To address these questions, we interviewed 15 PwMD to gain a deeper understanding of their perceptions related to sidewalk robot designs (RQ1). This exploration illuminated the potential impacts of robots on PwMDs navigation experiences. We further interviewed eight roboticists from both industrial and academic backgrounds. These interviews focused on identifying the organizational challenges and opportunities pivotal to enhancing accessibility in public robot design (RQ2). Building on findings from each set of interviews, we organized four co-design workshops, inviting PwMD and practitioners, working in pairs, to collaboratively conceptualize an accessible public service robot (RQ3). This process is summarized in Fig.1.

Our study offers three key contributions to the HCI community: First, it provides detailed qualitative insights into PwMD's perspectives on sidewalk robots. Second, this work reflects on the contemporary dynamics of accessible robots through the lens of robotics industry practitioners. Finally, through co-design workshops, participants showcase accessible robot design ideas and offer perspectives on integrating accessibility into future public robot design.

2 RELATED WORK

This work is situated at the intersection of sidewalk accessibility and HRI studies. Section2.1 draws on scholarship examining the current challenges that PwMD have navigating public spaces and new mobility technologies for addressing some of these issues. Section2.2 reviews ethnographic observations of and experiments with sidewalk robots in public spaces, while Section2.3 focuses on the influence of public robots on sidewalk accessibility. Finally, Section2.4 reviews accessible HRI design guidelines and participatory processes that inform our study, focusing on design factors essential to public robots.

2.1 Inaccessible Public Space and Mobility Technology

In the United States, regulations require that sidewalks be accessible to all individuals, including those using mobility devices such as wheelchairs [3]. Unfortunately, for people with disabilities (PWD), using sidewalks can present challenges that impact their quality of life [27, 43], independence [53], physical activity levels [53], and ability to participate fully in society [27]. These challenges are often due to barriers created by poor sidewalk design or construction, insufficient maintenance, or natural terrain features [27]. Studies on sidewalk accessibility have identified the challenges experienced by people with disabilities on a daily basis. Gharebaghi and Amin categorized these barriers into spatial (e.g., surface quality, slopes) and social (e.g., transport policy) factors [31]. Mehmet et al. identified various physical barriers, including uneven surfaces, obstructions, and insufficient width that impair sidewalk accessibility for PwMD [51].

Work by Froehlich and colleagues uses design and technology to address sidewalk accessibility challenges [29]. For instance, their team's research has explored the potential of crowdsourcing platforms and deep learning techniques to map sidewalk conditions, allowing for the assessment of sidewalk navigability [61]. Teams such as Kasemsuppakorn and Karimi have used similar data [40] to develop wheelchair routing systems that can avoid obstacles and impassable sidewalks [41, 42]. While such technology is helping PwMD better navigate sidewalks with fixed issues, the introduction of robots to public spaces raises questions about how PwMD navigation strategies may be affected. Our research focuses on how PwMD will interact with robots while also managing other fixed sidewalk issues. Work exploring prior deployments of public robots may suggest some ways in which they will alter public spaces and people's interaction with them on the sidewalk.

2.2 Robots in Public

Currently, there are various deployments of robots in public spaces, both in research contexts and as part of new services. Real-world deployments of robots in public include security robots that monitor parking lots and pedestrian malls¹ and dog-like robots to patrol public spaces and encourage social distancing during the COVID-19 pandemic [74] or support police operations for dirty, dangerous, and dull tasks [16]. The most widely deployed robots in public are delivery robots deployed by companies such as Starship, Kiwibot,

¹<https://www.knightsscope.com>

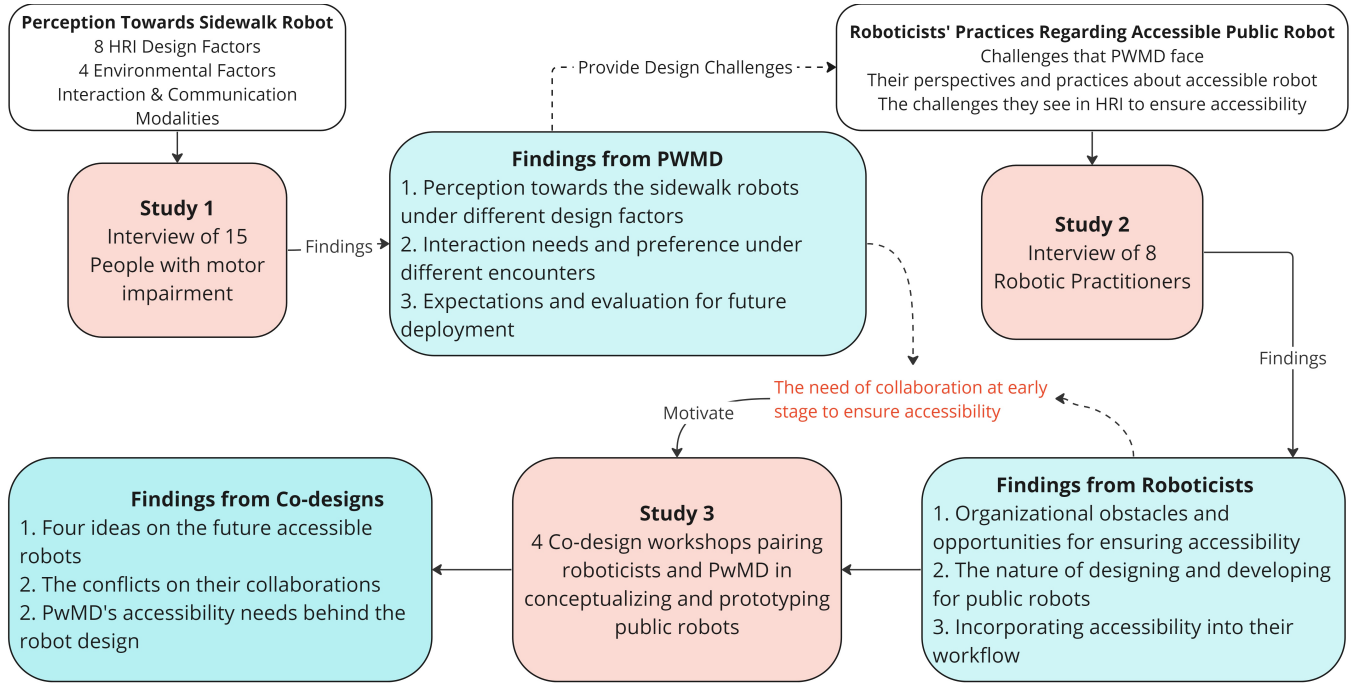


Figure 1: This flowchart illustrates the progressive approach taken in our three-part study and its key outcomes. The insights gained from the first study, which involved interviewing PwMD, were integrated into the interview framework conducted with robotic practitioners in study 2. The collective findings from both studies then formed the basis for the collaborative workshops in study 3.

Amazon, and FedEx. These robots often travel slowly along public sidewalks to deliver goods to people. In general, these robots do not often aim to interact with people, except when passing. However, prior work by HRI research teams suggests that even when robots have incidental interaction with non-users in public, they will nonetheless cause changes in how people behave, thus making it important for robot development teams to understand how the public might interact with their robots [60].

Prior work in public HRI studies suggests some ways that people will interact with different robots in public. Yang et al. [84] used Wizard-of-Oz field studies to develop socially acceptable movement and interactions for a robotic trashcan, finding that many people would actively ignore the robot if they did not want it to approach, would speak to the robot to summon it or request it leave, and would try to entice the robot with trash. A more recent deployment in New York City has replicated these results and shown that people are generally receptive to trash barrel robots when they are in public squares [15]. Work by Schneider et al. [64] testing a humanoid robot in a Japanese mall also found that roughly half of the people walking by ignored the robot unless the robot spoke to people and asked to not be ignored. Thunberg and Ziemke [72] found that many people in a European train station were not accustomed to interacting with a humanoid robot (Pepper by Aldebaran). [22] found that some people in Estonia helped delivery robots stuck in the snow, though they raise ethical issues about people providing free labor for delivery companies by helping the robots. [80] also observed people helping or ignoring stuck robots in a US city.

These results suggest a split among people's desire to interact with robots in public. Moreover, the works specifically observing delivery robots suggest that the robots have similar challenges on the sidewalk as PwMDs and that they too may become obstacles impeding walkways.

2.3 Public robot's impacts on sidewalk accessibility

We now consider prior work that further explores the potential impacts robots may have on the accessibility of pedestrian walkways. Weinberg et al. [80] found that robots could cause distractions and obstructions with different sidewalk users, such as blocking part of a sidewalk when stuck or causing dogs to become perturbed, by barking or lunging at the robots, and causing a minor scene on the sidewalk. Gehrke and colleagues [30] found that delivery robots deployed on a college campus provided convenient last-mile delivery but also caused conflicts in walking paths and potentially unsafe travel conditions, especially for cyclists.

Speaking directly to people with disabilities, Bennett et al. [12] highlight the safety concerns and real-world incidents of people with motor-related disabilities when encountering delivery robots on sidewalks, such as blocking access to a curb cut and preventing a wheelchair user to get from the street to back to the sidewalk. Bhat and Zhao [13] explored the experiences of individuals with visual impairments who directly interact with different mobile service robots, describing these robots as "dangerous" and "unfamiliar

moving obstacles” due to their lack of predictable behavior or clear intent. Due to such incidents and the potential harm that they may cause pedestrians and PwMDs, researchers such as Salvini et al. [62] have recommended government regulation of robot deployments in public areas to address the psychological and physical safety risks that arise when pedestrians interact with sidewalk robots in highly crowded street environments. Thomasen [71], however, argues that regulations must be carefully considered as different strategies for managing robots in public may help some people while encroaching on the rights of other’s access to public space.

Our research builds upon these prior works exploring the accessibility issues of public robots to understand the potential challenges that PwMDs believe could exist. Further, we also explore the perspectives of roboticists in considering accessibility during robot design. While regulation is one proposed way for maintaining accessibility, it will also need to be paired with accessible robot design strategies that roboticists can build upon, as described in the next section.

2.4 Accessible design strategies in Human-robot interaction

Both HRI and HCI communities have proposed design frameworks for robot designers to follow [11, 19]. However, there is less existing work on designing accessible service robots. We found only one proposal, evaluated by Qbilat [58], that specifically addressed accessibility in social robots by incorporating six other accessibility guidelines based on computer interface design (e.g. WCAG 2.0 [36], IBM accessibility [35]). However, accessibility recommendations based on screen-based interfaces may not provide useful guidance for a robot’s physical form and movement behavior. Prior HRI studies have shown various factors of robot behavior design that may affect people’s perception of safety and trust in robots. Previous experiments have shown that robot size, speed, and approaching behavior can alter people’s trust in robots in indoor environments [55]. Further work has explored proxemics and people’s comfort with robots at different distances and when approaching from different directions [63, 70, 78]. Overall, there are many factors robot designers must consider in making robot movements safe and accessible.

Due to the complexity of creating safe and accessible robot interaction and the current lack of clear guidelines and understanding of people’s responses to different robot designs, many teams approach designing robot behaviors through co-design workshops. Prior works on assistive robotics have found success in co-developing robots tailored to the needs of people with disabilities [26, 45, 75]. Based on these prior successes, researchers exploring public robots are also exploring participatory design approaches. Early work by [8] engaged people with vision disabilities (both designers and non-experts) through interviews, group co-design sessions, and Wizard-of-oz testing sessions to design robots that provide navigation guidance. Tian et al. [73] used participatory prototyping methods that involved programming robot interactions with the support of an expert and viewing them in a simulation to imagine how a humanoid robot could interact with people in public spaces. Sumartojo et al. [68] used images of public spaces overlaid with

different types of robots to elicit reactions from people about where such robots would or would not be appropriate.

Our research seeks to build upon the aforementioned participatory design research on public robots to better understand how the design choices involved in developing and deploying sidewalk robots might influence existing accessibility challenges. While Participatory Design methods have been shown to be fruitful in generating new robot concepts and surfacing important concerns from users, there is little work engaging PwMDs in discussing robots on public sidewalks. Our work builds on the methods of prior works by leveraging interviews and co-design sessions involving imagery and simulations [8, 73] to consider how robots on sidewalks should interact with PwMDs, described in Section 3. Our study seeks to bring together insights from PwMD and roboticists on the design and presence of sidewalk robots. By learning from both groups and facilitating a collaborative design process between PwMDs and roboticists, we aim to inform accessible robot development in public space—whose intricacies haven’t been fully examined.

3 METHODS

We adopted a multi-phased approach to examine the complex interplay between sidewalk robots, their design, and the perceptions they engender among PwMD and robotic practitioners. To understand how PwMD perceive sidewalk robots and investigate potential interaction methods, we interviewed 15 PwMD (refer to Table 1) with an average age of 32.5 years old ($SD=9.2$). We also engaged with eight robotic practitioners (refer to Table 2), with an average age of 28.1 years old ($SD=3.02$). We recruited four practitioners from industry and four from academia, to understand the current design and development processes of sidewalk robots, as well as their thoughts on public robots more broadly. The recruitment criteria for roboticists required that they have at least two years of experience working on HRI design, research, or development. Lastly, we held four co-design workshops pairing PwMD and robotic practitioners. We invited both four PwMD and two roboticists from previous interviewees and recruited two new roboticists as needed based on the same criteria. The pairs were formed based mainly on their availability and people with overlapping available times were paired together. All the activities were held over video conference. Interviews lasted 60–80 minutes and co-design workshops lasted 90 minutes. Participants were compensated with a \$20 Amazon gift card for each study. Our university’s Institutional Review Board (IRB) approved the recruitment and study procedure.

3.1 Interviews with People with Mobility Disabilities

In the interview with PwMD, we first asked our participants to share demographic information about themselves, such as age, gender, and their mobility impairment (should they wish to disclose). Then, we delved into the following topics:

3.1.1 Perception of Sidewalk Robot Design Factors. To ensure participants were familiar with the concept of sidewalk robots, we showed a video of a functioning delivery robot and images of various delivery robots [48]. As a starting point to discuss design forms, we presented eight widely recognized design factors such as speeds and social navigation strategies (refer to 4a) from the HRI literature









Factor name	Description	Citation	Factor name	Description	Citation
1  Robot size	We offered participants a comparison of two sidewalk robots of distinct dimensions. The larger robot's specifications were based on FedEx Roxo, (147.3 cm71.1 cm91.4 cm), while Starship's robot represented the smaller one (55.4 cm, 56.9 cm, 67.8 cm).	[46]	2  Robot group	We provided images comparing a single robot navigating on the sidewalk to a group of three robots moving together.	[34]
3  Approaching strategy	Approach strategy pertains to the robot's navigation methodology to approach a target. We presented participants with two videos, each depicting different approach strategies and turning points, aiming to elicit their responses to diverse navigating behaviors.	[39, 53, 81]	4  Social navigation	Participants were shown two social navigation strategies a robot might employ when encountering a pedestrian - maintaining a safe distance while navigating around the pedestrian, or halting movement entirely to allow the pedestrian to pass.	[44, 54, 65]
5  Communicative signals	Participants were presented with five communicative signals currently used by sidewalk robots - sound, facial expressions, on-screen text, on-screen icons, and lights. They were asked to share their perceptions and potential use cases for each.	[14, 20]	6  Speed	Three speed levels were presented: Fast (10 mph), Normal (3.4 mph), and Slow (2 mph). Participants were asked to share their perceptions and potential responses to encountering robots at these different speeds.	[66]
7  Color	We provided images of sidewalk robots exhibiting different color contrasts, inquiring how color variation might affect participants' perceptions of the robots.	[54]	8  Proxemics	Images depicting robots at varying distances from pedestrians were provided, and participants were asked to discuss how these distance variations might alter their perceptions of the robots.	[44, 66, 68]

Figure 2: Drawing from existing literature, we identified eight critical HRI design factors. This figure provides an overview of these factors, elucidates how they were presented to the participants, and references the corresponding literature.

Table 1: Demographic information of PwMD

Number	Gender	Age	Mobility Disability	Details
P1	Female	25	T5 complete Spinal Cord Injury	Use manual chairs
P2	Female	52	Idiopathic Brown Sequard Syndrome	Difficulty walking, not in a wheelchair anymore
P3	Male	34	L1 paraplegic	Wheelchair user, two years post-injury
P4	Male	25	T5 complete Spinal Cord Injury	Use manual wheelchairs
P5	Male	36	Quadriplegic	Uses a power wheelchair
P6	Male	36	L1 paraplegic	Manual wheelchair
P7	Female	21	spastic diplegic CP	Uses two loft-strand canes daily
P8	Female	29	C-5/6 quadriplegic	Use manual wheelchairs
P9	Male	19	physical disability from TK2D	Uses a power wheelchair
P10	Female	35	spinal cord injury	Walking difficulties
P11	Female	40	C5-C6 quadriplegic	Powerchair, paralyzed from armpits down
P12	Male	20	spastic diplegia cerebral palsy	Manual wheelchair
P13	Male	36	Quadriplegia from a SCI	Power wheelchair
P14	Male	41	Spinal cord injury	Power wheelchair
P15	Male	39	Quadriplegic	Manual wheelchair

to each participant (refer to Fig2 [14, 20, 25, 34, 39, 44, 46, 54, 55, 59, 66, 67, 70, 83]). We also selected four environmental barriers that might influence their perceptions about interacting with the robots including sidewalk width, slope, congestion, and weather [52]. Subsequently, we invited our participants to discuss how these factors might influence their perceptions and navigation experiences.

3.1.2 Interaction Modality. We then delved into interaction modalities, sharing six explanatory images as reference — voice interaction, gestures, apps, physical buttons, touchpads, and joysticks on the wheelchairs. Interviewees were encouraged to imagine how they might prefer to interact with the robots in different scenarios (e.g. if the robot is stuck in the road).

3.1.3 Future deployments. The final portion of the interview was centered on discussions of future deployments including the functionalities interviewees expected sidewalk robots to have, and how they wanted sidewalk robots to be introduced or deployed.

3.2 Interviews with Robotic Practitioners

In the second set of interviews with practitioners, we centered our conversations around two primary questions: (1) How do robotic practitioners consider accessibility within their current practice, and what opportunities do they see for improvement? (2) Given the challenges highlighted by PwMD, how can public robots be made more accessible?

Initially, we delved into their perspectives on the state of accessible robots in their respective contexts, whether in companies

Table 2: Demographic Information of Robotic Practitioners

Number	Gender	Age	Organization	Role	Description
R1	Male	29	U.S University	HRI researcher	Ph.D. students in Human-robot co-learning research
R2	Female	26	U.S University	HRI researcher	Ph.D. students researching the conversational interface and accessibility in human-robot interaction
R3	Female	25	U.S University	HRI researcher	Ph.D. students researching social navigation in human-robot interaction
R4	Male	29	Start-up Robot Company	Product Manager	PM at a room cleaning robot company with HRI knowledge; observed PDD for 6 months
R5	Female	26	Robot Department at a large company	Backend Engineer	Responsible for the backend of home robots; has experience working with visually-impaired groups
R6	Male	34	Robot Department at a large company	Safety Engineer	Has 7 years of experience in the safety team of a large company's robot product
R7	Female	N/A	Start-up Robot Company	User Experience Designer Manager	Founding member of the UX design team at an autonomous robot company with one year of experience
R8	Female	28	Canadian University	HRI researcher	Ph.D. students developing virtual simulations for people with disabilities interacting with autonomous vehicles

Table 3: Demographic Information of Workshops

Number	PwMD Participants	Roboticians Participants
W1	A 21 years old female cane user	A 26 years old HRI researcher on the conversational interface and accessibility
W2	A 38 years old power female chair user	A 38 years old founder of a robotics start-up
W3	A 40 years old male power chair user	A 30 years old HRI researcher on assistive technology
W4	A 34 years old male power chair user	A 26 years old back-end robotic engineer

or academic institutions. We sought to understand the obstacles they might face in ensuring accessibility for the robots they work on. We then explored potential avenues for change, posing questions like, "What values, methods, and research-based strategies are essential to incorporate accessibility features into public robots?" These questions were tailored to their specific roles (e.g., designer, researcher, or developer). Furthermore, we addressed the practical challenges outlined by PwMD in our initial interviews. For instance, we discussed issues like competition for sidewalk resources and invited suggestions on potential solutions.

3.3 Co-Design Workshop

Building on our findings from interviews, in the final stage of our research, we organized four co-design workshops pairing PwMD and robotic practitioners to explore how their early collaboration could inform accessible robot design. The procedure of the workshop was:

3.3.1 Onboarding and Introduction: Participants were sent preparatory materials introducing them to the format of the workshop and sharing examples of existing public robots such as delivery robots and security robots. When the workshop started, we introduced

the facilitators, and each participant, and emphasized that the two groups' insights are equally important.

3.3.2 Activity 1 – Conceptualize and Ideate the Robot: In the first part of the co-design session, participants were asked to reimagine sidewalk robot technology such that accessibility is centered, and broad public interest is honored. We also provided prompts including functionalities and scenarios to help them narrow down (refer to 3a). One of the facilitators hand sketched participants' ideas as they discussed, and later asked participants for input or modifications to both ensure accuracy of representation and to promote ongoing discussion.

3.3.3 Activity 2 – Robot Communication & Interaction Under Different Scenarios: After participants converged around a particular robot idea, they moved to the second activity, which involved picking a card with a scenario and developing the interaction and communication of the robot (refer to 3b). The scenarios contained situations from the first activity, as well as predetermined encounters, such as robots stuck in the road. To support the activity, we provided the interaction modalities and communication channels we used in the first interview for their reference.

CONCEPTUALIZE A PUBLIC ROBOT

MAIN FUNCTIONALITY
Identify the core purpose of your robot in the context of its intended environment or role. What is the primary task it is designed to accomplish?

SOCIAL FUNCTIONALITY
Reflect on how your robot could interact effectively with humans. How could it communicate its intentions or actions in an intuitive manner?

ACCESSIBLE FUNCTIONALITY
How does your robot prioritize inclusivity in its design, ensuring that its benefits and services are accessible to all users, regardless of their physical abilities?

CONFRONTATION SCENARIO

In this scenario, you would illustrate the potential negative interactions between the robot and individuals with motor impairment.

BONDING SCENARIO

In contrast, in this scenario, the robot is acting as an aid or companion to the motor-impaired individuals. It could be assisting in tasks that might be challenging due to the individual's physical limitations.

(a) The 'Conceptualize a Public Robot' board includes a series of prompts for the first activity of our workshops. We outlined three aspects of functionality to help participants navigate to the goal. After they decided on the main idea, we encouraged them to think about negative and positive scenarios.

DESIGN OF INTERACTIONS AND COMMUNICATIONS

The Robot Bumps Into Your Mobility Aids

The Robot Wants To Notify You Its Behavior

You Are In Need Of An Information

How Do You Want To Ask The Robot

Please Come Up With A Scenario The Robot Might Cause A Problem To Others

(b) The 'Design of Interactions And Communications' board contains cards about both negative and positive encounters with the robots (e.g., the robot bumps into your mobility aid). Participants selected cards based on their robots. We then asked what interactions or communications they would like the robot to have.

Figure 3: Two elements of the design activity template that we used to facilitate the co-design workshop

3.3.4 Discussion and Reflection: Finally, participants revisited their initial robot designs, often making adjustments and reflecting on how engineers could enhance engagements with PwMD. The workshop concluded with a survey to gather feedback on its effectiveness and participants' views on creating accessible public robots.

3.4 Data analysis

We analyzed our data using a mixed inductive and deductive qualitative analysis [25]. To begin, three research team members developed a set of deductive codes by reviewing the interview and co-design

study protocols. The deductive codes were mainly based on the pre-set topics in our interview questions. For example, the interview of PwMD contains pre-set topics on interaction preferences, design factors, and attitudes toward sharing the sidewalk. Then, three team members collectively coded two interview transcripts and two workshop transcripts, combining the deductive codes and bottom-up coding strategies to build an initial codebook. The first author independently coded all remaining data, with all authors convening to discuss and resolve conflicts (e.g., missing codes, disagreement on codes). Each code, along with its corresponding interview transcript section, was sorted into an affinity diagram. This process

continued until broader patterns and relationships appeared. The semantic analysis steps stopped when all team members reached a consensus around key themes, including PwMD's perceptions of sidewalk robots, practitioners' challenges for ensuring accessibility, and robot ideas in co-design.

4 FINDINGS: PWMD'S PERCEPTIONS OF SIDEWALK ROBOTS

In the first section of our findings, we describe how PwMD perceive sidewalk robots, examining various design facets, interaction dynamics, and prospective deployments. We find three potential conflicts around the current scarcity of sidewalk space and curb cuts, robots causing PwMDs to inconveniently change their path, and an inability to communicate with robots. We also find two themes focusing on interaction that ensures safety and usable communication modalities. We conclude with two themes highlighting future expectations on robots having altruistic functions benefiting disabled people and ensuring accountability and transparency of robots operations.

4.1 Concerns on Robots' Presence and Design

4.1.1 Potential Conflicts Over Competing Sidewalk Resources. The **scarcity of sidewalk space** was a unanimous concern among participants, should robots fail to adjust their routes to make way for passersby. For the PwMD we spoke with, this issue significantly complicates the process of maneuvering around the robots, potentially forcing them to **resort to dangerous or inconvenient path adjustments**. P1, for instance, expressed concerns about getting trapped on the sidewalk when encountering these robots:

"...especially if there are also trees, and bricks that might obstruct me. Do I have any space to move around? Most likely, I would have to go down the sidewalk! But after I get down, can I come up again, or is there any way to make [the robot] move away?"

A similar concern was echoed by 9 other participants, who suggested various **coping strategies**, such as backing up and leaving the sidewalk to allow the robots to pass (P1, P6, P9, P12, P14), venturing onto potentially hazardous grassy or uneven areas (P4, P9, P11), seeking shelter by residences or stores (P8), or modifying their original route (P10, P15). According to our interviewees, some of these actions could pose challenges due to one's mobility disability. For instance, once one leaves the sidewalk, it might be difficult to return. P9 mentioned how their wheelchair could easily "sink into the grass, especially if it's raining." These potential conflicts induced feelings of frustration, fear, and even anger among the participants. P3, for instance, claimed they might even "*knock it over if that thing [robot] was in the way.*"

Our interviewees also described curb cuts as another critical resource and site of potential conflict with sidewalk robots. Participants discussed that the real-world accidents, such as [7], mentioned before might not be isolated incidents. All participants acknowledged the irreplaceable value of curb cuts and voiced concerns about how robots' presence might exacerbate their existing scarcity. P14 explicitly shared their worry that **"...the curb cuts could be a point of contention when I need the curb cut and the robot also needs the curb cut when we're trying to get on."** This apprehension

around the loss of access to curb cuts was amplified when interviewees considered the scenario of multiple robots operating on sidewalks concurrently.

When presented with an image of several robots on a sidewalk (refer to Fig.4b²), an overwhelming majority of participants (14 out of 15) reacted negatively. P2 mentioned: *"...If I come across a line of small robots near the curb cut, I might choose to stop, even if I have pressing matters to attend to..."* P1, P9, and P12 shared similar **anxieties about navigating past a group of robots**. Despite there being space between the robots in the image, P9 and P12 expressed hesitation, attributing this to the challenge of judging the adequacy of the space and the unpredictability of the robots' movements.

4.1.2 Sense-Making and Communicating Sidewalk Robot Behavior. Interviewees described how explicit communication could prevent and mitigate potential conflicts. All participants emphasized the significance of communication, and nine (P1-5, P7-9, P13) suggested that **robots should announce their presence** when turning, changing speed or trajectory, or approaching PwMD. Voice announcements were viewed as an effective and intuitive method for robots to communicate their presence and intentions on public sidewalks. P4 and P5 additionally suggested a polite, soft beep as an acknowledgment of PwMD's presence or intent to change directions.

In addition to auditory cues, visual cues such as text and icons were deemed lightweight yet effective communication channels, especially in "crowded situations where auditory cues might be lost" (P13,15). However, participants also highlighted some limitations of visual cues. For instance, the robot's low height might make legibility difficult, and the cognitive load associated with comprehending text might be a barrier to quick transmission of the message (P5,7). Therefore, combining text with icons could improve understanding (P7).


Nevertheless, P9 pointed out the potential for misinterpretation with oversimplified signals, such as confusion over who should move when a left turn icon is displayed. Auditory cues could also lead to confusion on crowded sidewalks, where the source of sounds might not be immediately identifiable.

4.1.3 Recognition and Adaptation to PwMD. Nine participants expressed concerns about whether sidewalk robots would be capable of effectively navigating around them, given that their mobility aids might cause them to move differently than people walking on feet. As a remedy, several participants suggested they would be reassured if **the robots show that they can recognize their disabilities and the robot's navigation algorithm could adapt to their mobility aids**. P8 and P12 expressed desires for robots to exhibit some form of acknowledgment that they have detected a wheelchair or sensed behavioral shifts, like moving slower than other nearby pedestrians. P4 underlined the importance of recognition as fundamental to robots learning to *"treat wheelchair users respectfully"*. At the same time, our participants also raised concerns about robots' proficiency in accurately recognizing and **responding to a diverse range of mobility aids** and their distinct usage

²Image resource: <https://smudailycampus.com/1060221/news/starship-food-delivery-robots-land-at-smu/>



(a) A simulation video used to showcase different strategies of social navigation with sidewalk robots

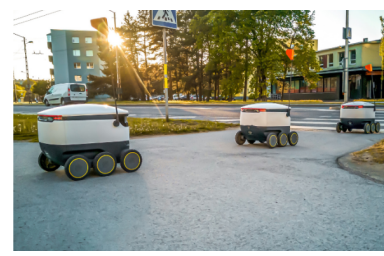

(b) An image used to probe how PwMD would respond to multiple sidewalk robots

Figure 4: Images presented during the interviews with PwMD. The images depict possible encounters with sidewalk robot scenarios to probe design factors.

patterns, which could be challenging even for the users themselves to articulate.

4.1.4 Robot Design Factor Tensions. When presenting the design factors, there was always no unified preference — each option carries its rationale and limitations. For example, in terms of form, large robots were more likely to be viewed as **obstructing sidewalks and invoking fear** (P2). Smaller robots elicited less fear and were thought of as taking up less sidewalk space, but they presented a different issue of potentially trapping pedestrians. P8 observed that “(Wheelchair users) may not see the smaller robot if not spotted from a distance.” P1 expressed concerns about the difficulty of interacting with shorter robots:

I feel that the (small robot) is less user-friendly because I can at least touch the top of the taller one.[...] taller one might have operational or interactive functions on top, so I can effectively communicate or signal that it has impacted me[...]

However, in contemplating whether the robots could halt their movement to allow someone to pass, P1, P3, and P13 highlighted a key concern that the **robots’ stopping points might coincide with the trajectory of their wheelchairs**. To avoid the stationary robot, they would have to adjust their own paths. This adjustment is not a straightforward task; for PwMD, especially those relying on manual wheelchairs, altering direction involves physical effort and precise maneuvering, which can be time-consuming.

4.2 Designing Interaction with Sidewalk Robots

4.2.1 Purpose of the Interaction with Sidewalk Robots. Considering the potential conflicts and confusions presented above, all participants underscored the importance of **interactions with sidewalk robots to ensure safety**. Critical situations like competing for curb-cut access or **evading dangerous areas necessitate effective interaction with the robots**. Voice interaction was considered the most effective mode in these cases, with P6 stating they would vocally command the robot to move. P8 highlighted their comfort in expressing their needs and emotions to the robot:

If the robot makes some movement that could lead me to a problem[...] I will say that can you choose

another way? Or is there another option because I’m not comfortable?

Access to sidewalks was a significant concern for participants, emphasizing the need to **command the robot to leave the sidewalk** through a button or voice command. P9 elaborated, “*The biggest thing for any sidewalk robot is, there [must be] a way for it to get off the sidewalk...*” This sentiment was echoed by P1, P3, and P10, as they felt it could alleviate potential bottlenecks of the curb cut and better accommodate narrower sidewalks.

While participants generally felt less need to interact with robots in non-conflict scenarios, they acknowledged that such **interactions could alleviate anxiety**. Some participants even expressed a desire for casual, human-like interactions with the robots. For instance, P4 said that when a robot passes close by, they would like it to say “*excuse me*” much like another pedestrian would.

Addressing robot malfunctions is another circumstance where participants underlined the need for effective interactions. P7 and P8 called for a feature to directly contact operators to address arising issues. However, they also acknowledged that operators might not always be immediately available. In such scenarios, the robots should be programmed to **deliver clear, comprehensible instructions to the public**. This way, bystanders might be more able to assist in mitigating the situation. The guidance could encompass steps to temporarily disable the robot and safely move it out of the way, effectively preventing the malfunctioning robot from becoming an obstacle on the sidewalk.

4.2.2 Exploring the Usability of Interaction Modalities in Public Settings. In pursuit of efficient interactions, we examined the **usability of six potential interaction modalities**. Voice interaction and touchpads emerged as popular choices. P5, P6, and P9 preferred voice interaction for its convenience and non-disruptive nature, as it doesn’t necessitate pausing current activities. However, P4 raised concerns about the **reliability of voice recognition**, especially regarding accents, fearing this could lead to miscommunication. They preferred a screen-based interaction for its clarity and definiteness, as “*the UX[user experience] design can give clear instruction and meaning without ambiguity.*” The merits of physical interactions were acknowledged by P1 and P3, who argued that buttons could **distill complex commands into simple, easily understood interactions**.

However, participants also cautioned that direct **contact with the robots might interfere with their personal affairs**, with P10, emphasizing, *“If interaction forces people to stop and spend a significant amount of time, the robots will quickly fall out of favor.”* Balancing the need for effective communication and personal convenience, P8 and P10 favored app-based solutions. They appreciated the non-disruptive and streamlined nature of this modality. P1 also spoke about how they use gestures to communicate with other vehicles and reasoned that if robots could accurately recognize these gestures, this modality could prove helpful in adjusting social distance or directing robot movements.

4.3 Expectations and Aspirations for Accessible Public Robots

4.3.1 Functionalities and Information Beneficial to the Disabled Community. 80% of the participants expressed interest in using delivery robots but felt that the **delivery functionality alone was insufficient for serving and benefiting the disabled community**. Alternate forms of sidewalk robots, such as snow-clearing and safety robots, were perceived positively. For instance, while P3 was not in favor of delivery robots, they found the concept of snow-clearing robots intriguing, especially due to the difficulties posed by snowy conditions. Other participants cited the challenges icy roads present during winter. P11 remarked, *“If the robot could alert me about hazardous roads, it might embolden me to venture out during winter.”* P2 and P6 floated the idea of multi-functional robots that primarily handle deliveries but could also provide other functionalities, enhancing their acceptability. For example, P2 argued that *“Since it’s a delivery robot, it might also bring some first-aid medicine that could save people’s lives”* and thought it could contribute to positive public perception.

Discussing the potential data types beneficial for detecting road conditions, the concept of **robots disseminating road information was generally welcomed**, aligning with current trends in mobility technologies (refer to Section 2.1). P4, for instance, commented that he had already installed a local app that reports roadblocks and believed that the robot *“can definitely help more because they are patrolling all the time and the data will be more up-to-date.”* Pothole detection was suggested by P1, P3, P6, P7, and P8, with P8 adding that the depth of potholes is another crucial parameter for PwMD since they often do not notice them until *“they actually get stuck by the potholes.”* The identification of roadblocks and obstacles like sticks and pipes was also recognized as contributing to the navigation experience of PwMD.

4.3.2 Ensuring Robot Accountability and Transparency. Beyond expanded functionalities, all the participants emphasized the crucial role of **handling technical failures to ensure safety**. P3, in particular, stressed that while technical failures are inevitable, *“there should be ways to mitigate”* issues. As described in the interaction section (refer to Section 4.2.2), alternative modalities were suggested by participants to counterbalance the effects of one function failing. This call for a failure-handling function to maintain robot communication was also echoed by P1, P3, and P6. P1 proposed the inclusion of emergency buttons, so the robot could move itself to a safer location when it becomes obstructed.

When operating normally, participants expressed the expectation for the robot’s interaction to remain stable and accountable, notwithstanding environmental influences. If certain interaction modalities fail, the robot should explicitly communicate this. P4, for example, stated that if the voice system is less accurate in recognizing their sounds, the robot should be transparent about this and provide instructions on how to use other interactive methods, such as a touchpad, to fulfill their needs. The desire to understand how to interact with the robots and their performance parameters under different conditions was voiced by P1, P4, P7, and P10.

Twelve participants also advocated for **engaging in conversations with governments and robot companies**. P14, a wheelchair user and software engineer, believed that robot companies should make changes to their processes to incorporate accessibility, including regularly talking to PwMD. P10 remarked that governments should be more involved in the oversight and deployment of robots in public: *“I think the technology can only be beneficial if the governments introduce them in the right way.”*

5 FINDINGS: NAVIGATING THE TERRAIN OF ORGANIZATIONAL PRACTICES – CHALLENGES AND POTENTIAL

Our findings so far suggest current robotic practices may not sufficiently account for accessibility. Thus, in this section, we examine the views of robotic practitioners from both industry and academia who reflect on organizational challenges hindering accessibility, and how they might better ensure inclusive practices by integrating conversation with people with disabilities and disability-oriented design thinking early into the robot design process. In the context of PwMD’s needs, we also investigate strategies for deploying and operating public service robots by collecting feedback from diverse groups of stakeholders in real-world settings and in developing plans to fix emergent issues. Furthermore, our findings indicate roboticists’ suggestions for comprehensive regulations on robot speed, weight, and interaction design that may lead to more accessible robots by design.

5.1 Organizational Practices for Infusing Accessibility into Robotic Development

5.1.1 Obstacles to Guarantee Accessibility. Industry practitioners (R4-7) shared their experiences on how robotic companies often **overlook accessibility**. R5, for example, drew attention to feature prioritization metrics their company followed, noting, *“[the company] always focus[es] on high impact, low effort tasks first”*. Unfortunately, when the “impact” is measured by the number of affected individuals, accessibility initiatives can be sidelined, R5 explained. Even when robotics companies anticipate interactions with disabled people, representatives may point to limited funding or time as a reason for not considering disabled people’s needs. R4 expressed this candidly, and R5, R6, and R7 echoed the sentiment:

The problem is that most of the companies developing robots are startups, and they don’t care, or they don’t have the time to be able to do the proper compliance steps[...] It’s just hard and expensive. And so a lot of startups, either don’t know it exists or they do know

it exists[...] It's not worth doing because they would run out of money before they could make their first robot (R4).

As a result, instead of proactive measures, robotics companies might ‘*prioritize it only after a problem occurs (R5)*’ and ‘*hope they can convince the regulators to not shut down their companies [after the problem] (R6)*.’ However, most of our participants shared the arguments that **accessibility issues are harder to tackle if not integrated from the start**. R5 and R7 shared this point based on their previous experience facing compatibility problems. R7 reported problems they faced when retrofitting to improve the user interfaces as “complex hardware, rudimentary software, interoperability problems.” R6 referred to their experience working on safety and asserted that if you fail to consider safety metrics early, and “*only do it as a checkbox later, you’re almost certainly not going to pass.*”

5.1.2 Importance of Considering People with Disabilities. All robotics practitioner participants believed that *co-design and early inclusion of PwMD and other PWD is necessary*. R5 emphasized the **importance of directly engaging people with mobility disability**. They referred their experience pitching to public sectors, and noted that showing the response from PwMD could support their illustration and get approval. R8, an HRI researcher, championed direct involvement over empathetic design for its potential to “minimize discrepancies and understand genuine challenges.” R5’s experience revealed how initial product ideas often undergo numerous modifications. And “engineers tasked with these changes might lack an accessibility perspective, potentially bringing more inaccessible features.” R4 believed that to have the right voice, there is a need to “have disabled workers in the room” which will “automatically build solutions that have some weight [around accessibility] to them.”

Additionally, our participants also noted an **incentive for robotic practitioners to embrace accessibility** since avoiding accessibility can harm reputation—a point raised by R2, R4, R6, and R7. R7 stated:

If you’re asking, well, can we afford to do accessibility? That’s really the wrong question. The question is more like, are we an ethical organization, and do we want to make decisions with an ethical mindset as a rule? (R7)

R1, R4, R5, and R7 endorsed the notion that **considering accessibility improves product design and benefits everyone** and commented that designing for people with disabilities can improve acceptance of robots among broader groups of people. “If the robot companies evaluate the impact of accessible features,” said R5, “they would see how broadly it can be useful.” R4 recounted how designing for the elderly indirectly improved robot communication, turning it into a competitive advantage.

Ultimately, our participants believed that prioritizing accessibility offers a plethora of benefits that robotic companies often undervalue, such as preventing later costly modifications and improving their products. However, to achieve these benefits, there is

a need for **broad-ranging collaborations both within and outside these organizations**. To comprehensively examine accessibility, R6 envisioned a multifaceted team, integrating UX researchers, HRI specialists, and professionals well-acquainted with the robot’s operational milieu. Addressing legal hurdles, for example, would require team members with knowledge of local and federal regulations. R2 stressed that collaboration should span the spectrum of robotic development because it “bridges the divide between user requirements and technological solutions.” Further, deployment in public spaces brings to light the crucial need for collaboration with policymakers. R5 pointed to, what they described as, impediments introduced by government regulations, which blocked the roll-out of particular features. Across our interviews, participants advocated for a comprehensive approach, combining legal insights, research expertise, and safety awareness, to achieve an inclusive, safe, and user-friendly robotic landscape.

5.2 Deployment and Operation of Public Robots

Designing robots for public venues is complicated, and practitioners in our interviews discussed the multiple challenges inherent in this domain. R2 emphasized the **diverse reactions of bystanders**, pondering over the dilemma, “*How can a robot engage without disrupting regular activities in public spaces?*” Echoing concerns expressed by PwMD (refer to Section 4.1.2), R2 noted that a robot’s unfamiliar presence might cause individuals to halt their activities, suggesting a need for **clearer robot communication**. This would require modeling human perception to the robot behavior (R1), and versatile digital, and physical engagements (R8). R1, an HRI researcher, articulated a longstanding challenge:

Appropriately modeling human behavior[to the robots]...is a huge challenge that we still need to do a lot of work [...] to have robots actually behave the way we want them to and expect them to.

Thus, prior to any large-scale robot deployment, practitioners argued that it is pivotal to **discern how PwMD interacts with robots in real-world settings**. R2 and R6 pointed out potential disparities between what users say and how they act. Achieving this understanding would require the development and use of research methodologies that uncover how people interact with robots, such as ethnographic observation (R4), and establishing robotic simulation platforms to test and tweak robot behavior (R2, R8).

Designing robots for complex public spaces also requires an understanding of the environment and its possible impacts on human-robot interactions. As highlighted by R6, even seemingly defined environments, such as a museum with flat floors, might surprise roboticists. Such a place can have “variations in flooring—shiny, matte, black, white, all things that make robots upset... and exponentially increase the complexity of running safety analysis.” In even more complex and unpredictable public spaces, R4 remarked that robots will inevitably fail, which makes designing for failure cases and immediate damage control crucial to mitigating negative or dangerous interactions.

Offering a provisional solution to such failures, R2 suggested robots be equipped to **guide the public in fixing emergent malfunctions, and apologize for mishaps**, an idea corroborated by prior research [21] and echoed by R3. However, as R6 emphasized,

failure control might not suffice in extreme situations, such as a robot running into a toddler. Further, R6 asked, "How effective would human intervention be in these scenarios?" Drawing from their experience in safety assessments, R6 elaborated, "*Merely making marginal safety enhancements to a system capable of inflicting potential harm doesn't fundamentally alter the risk equation.*" R6, therefore, advocated for stringent regulations overseeing public robots, up to and including potential product recalls when necessary.

5.3 Regulatory Frameworks and Guidelines for Robot Accessibility

Given the intricacies of the robotics industry and its interactions within public spaces, five participants (R2, R4-5, R6, R8) also shared **the need for more regulations and guidelines** for all robotic development stages. R6 observed that while certain robotic firms have established safety protocols, emerging sectors within robotics lack the institutional "muscle memory" or corporate culture for structuring design processes with safety and accessibility at the forefront. The absence of regulations and guidelines has implications; for example, roboticists may be inclined to prioritize novel features over core concerns of safety and accessibility. This leads to a potential introduction of features that may compromise safety or inclusivity. R2, R5, and R7 also called out the need for well-defined design standards, particularly given a lack of concrete, user-friendly accessibility guidelines for robotic design. Drawing a parallel to web accessibility standards such as Web Content Accessibility Guidelines (WCAG)³, R7 underscored how integrating accessibility checking into workflows to evaluate and address accessibility issues can empower practitioners.

Several participants requested action for overarching regulations, possibly spearheaded by governmental bodies. Current regulations mainly focus on parameters like weight limits and speed [77], but R8 argued that there's a broader spectrum to examine. Interviewees proposed rules like a robot being required to maintain a certain distance from people (R2), automatically replanning when it detects people approaching curb cuts (R3), following the social norm of staying on one side of the road in most cases (R3), and restrictions on the concurrent number of robots on a single road (R3). Other ideas included changes to the built environment that would impact how robots and people interact. For example, R2 and R8 shared ideas of dedicated pathways for robots on sidewalks, especially if their prevalence surges. R8 visualized a synergy with smart infrastructure:

When the robot is coming, we will know that it's coming, and it's going to use this space. But at the other time, we can definitely use the whole space when there is no robot... I do not even have to look at the robot. I know, because of the lighting that is displayed on the road or maybe projected on the road, the LEDs (R8).

However, our discussions primarily revolved around regulating robotic behavior rather than changing the environment, likely due to participants' HRI backgrounds.

³<https://www.w3.org/TR/WCAG20/>

6 CO-DESIGNING PUBLIC SERVICE ROBOTS, PAIRING PWMD AND ROBOTIC PRACTITIONERS

Across both sets of interviews, roboticists and PwMD called for a need to collaborate with each other. PwMD argued that public sidewalk robots should bring more value and designers should work to counter the potential negative effects on their navigation (Section 4.3). Furthermore, PwMD desired to be more informed throughout the robot design process (Section 4.3.2), while roboticists believed that early conversations with PwMD could help prevent accessibility problems later. To explore what kinds of ideas PwMD and roboticists might conceptualize together, we held four co-design workshops including our PwMD and roboticist interviewees.

In the workshops, we saw PwMD imagine robots being deployed in ways to alleviate their accessibility challenges as well as serve the public good. PwMD proposed novel functions of robots, and roboticists elaborated on the concepts by assessing their technical feasibility. Teams considered the physical factors (e.g., size, colors, morphology), communication systems (e.g., screens, voice commands), and interaction dynamics (e.g., movement patterns, approach behaviors) of potential robots.

6.1 Overview of the Generated Robot Ideas

Below, we present each of the four robot ideas from the collaborations. To contextualize each idea, we describe the team composition and how each team interacted with one another⁴. These ideas focus on robots that could support PwMD and include a cargo-carrying robot, a robot to grab and hold groceries in a store, a crosswalk guide robot, and a snow plow robot for clearing sidewalks.

6.2 Uncovered Accessibility Needs and Concerns

As part of our protocol, we asked workshop teams to center the needs of PwMD in creating their robot concept. This led to designs that focused on specific needs for PwMD such as carrying or reaching items independently (W1, W2) and providing increased safety on public walkways (W3, W4). Throughout the co-design engagements, there were instances where teams needed to work through conflicts around robot features desired by PwMD and the technical feasibility of implementing such features (frequently emphasized by roboticists). These disagreements would often lead to more accessibility needs and concerns being uncovered. To illustrate such conflicts and how they realized more detailed accessibility issues, we present two vignettes from the workshops.

Vignettes 1: Why Opt For a Robot if it Can't Outperform a Human Assistant?

In Workshop 2 (W2), Adrianne, a power chair user with limited hand dexterity, expressed a desire for assistance in fetching groceries. When Michael, a roboticist, sought to understand how long Adrianne's grocery fetching task would take, he learned that with human assistance, Adrianne could fetch five items in approximately 20 minutes. "But would a robot match a

⁴We used pseudonyms for all participants. Detailed information of each participant can be found in Table 3

Workshop 1 (W1): Cargo Carrier

<i>Lily:</i> Cane user	Lily, a cane user, and Bella, an HRI researcher, collaborated to design an assistive cargo-following robot (refer to Fig.5a). To serve broader populations, they envisioned the robots being available for rent to any PwMD who might need them. They considered ideas like height adjustability and showing an avatar on the robot screen to display whose cargo it is carrying. Bella introduced voice and smartphone control opportunities while noting concerns such as the robot alarming other public users. Both acknowledged the robot's accessibility challenges and proposed features, including self-parking and secondary user recognition.
<i>Bella:</i> HRI researcher	

Workshop 2 (W2): Grocery fetcher

<i>Adrianne:</i> Power chair user	Michael and Adrianne imagined a robotic shopping aid (refer to Fig.5b). Michael is an HRI researcher and the current CEO of a robotics startup. Adrianne uses a wheelchair, making it hard to reach high shelves to collect items at the grocery store. Moreover, she also has limited hand dexterity. Together, Michael and Adrianne conceptualized a robot to help her fetch items at the store or other places when she needed to do so. Michael led their conversation by asking questions about Adrianne experience as a disabled person and the obstacles she faces, and together, they developed the idea for a robot that sought out things using a perception system, grabbed items with arms, and could be integrated onto a shopping cart.
<i>Michael:</i> CEO of a robotics start-up	

Workshop 3 (W3): Crosswalk guide

<i>Zac:</i> Power chair user	Zac and Nora co-developed a guide robot for safe street crossings (refer to Fig.5c). Originating from Zac's challenges navigating in traffic, the design catered to a broad demographic, including dog walkers and elderly folks. Responding to Zac's concerns about accidents and pedestrians, Nora focused on the robot's core safety functions: vehicle detection, pedestrian status updates, and driver alerts. They added emergency responses and car impact resistance. Inspired by Zac's vision of connected devices, they believed the robots could have the capability to communicate with autonomous cars and halt them before they could hit someone.
<i>Nora:</i> HRI researcher	

Workshop 4 (W4): Snow plow


<i>Will:</i> Power chair user	Will and Emma collaborated to conceptualize a sidewalk snow plow robot (refer to Fig.5d). Emma is an HRI researcher and engineer. Will is a lawyer and a power wheelchair user with limited hand and arm dexterity. They designed a robot meant to plow snow in extreme weather and late at night when it could be dangerous for humans to work. They imagined this technology as a method to keep streets clean and improve the efficiency of plowing snow while having minimal impact on human workers.
<i>Emma:</i> Robotic engineer	

human's efficiency?" Adrianne asked. "Not a chance," Michael admitted frankly, acknowledging the technical reality that robots would likely lag behind humans in terms of efficiently navigating a grocery store and locating items. "My life is about taking things slowly. It's fine if it takes three times longer," Adrianne responded. She shared feelings of being hesitant to inconvenience others when she needed assistance in the store. Adrianne explained that a robot might circumvent such social discomforts and support her autonomy. Through this exchange, the core value of the robot Adrianne proposed became clear to Michael: not to offer mere efficiency, but the prospect of furthering her autonomy.

During the co-design sessions, the PwMD and roboticists often came to a compromise on technical features, but there were also cases where PwMD remained unwavering in what they believed were their most important requirements.

Vignette 2: I Value Your Concerns, But This is What I Need As a Cane User

In W1, Lily, a cane user, and Bella, an HRI researcher, decided to conceptualize a cargo-carrying robot. Lily immediately proposed that the device be built to "adjust to different heights for people to easily get access to it" because of her inability to bend over. She elaborated: "*If I need to press a button or tell it to do something, it's important to me that I don't have to really stretch up or really bend down to do that because that's something that would catch me off balance somewhat.*" Bella scrutinized this functionality, worrying that "it might be terrifying to other groups like elders" when changing shape. Although Lily admitted there was a possibility that a robot adjusting its height could be disturbing, she insisted it would "be useful for broader groups of people with mobility disability like wheelchair users" This feature later became one of the main attributes of the robot because Lily suggested various heights the robot should cater to, taking into account situations where she might be using a wheelchair or standing with the support of

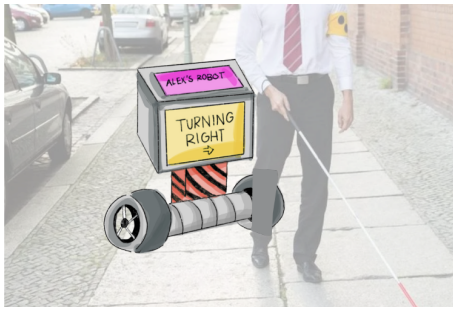


(a) Cargo Carrier Robot designed in Workshop 1



(b) Grocery Fetcher Robot designed in Workshop 2



(c) Crosswalk Guider Robot designed in Workshop 3

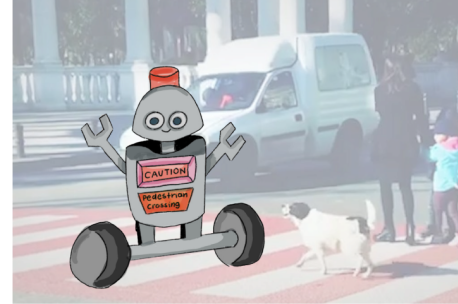

(d) Snow Plow Robot designed in Workshop 4

Figure 5: Final illustrations of the robot ideas from the four co-design workshops. The illustrations have also been photo-edited to depict the public venue they operate within in the background.

canes. She felt that she was shorter than the average person.

Across the Workshops, teams discussed a variety of accessibility needs that their robot concepts aimed to address. While the true feasibility of each concept would require extensive testing, we believe that each brings up more needs that could be generalized to other robots for public use. The following summarizes the core accessibility needs of each workshop, grouped by functionalities and interactions.

6.3 Summary of the Implications to Future HRI Practice

Abstracting beyond the specific needs of each robot, the collective needs uncovered in the workshops appear to address three areas. First, there is a need for different robots to carry and transport items for PwMD as they are moving about the world. Second, various communication modalities were desired, including voice interaction and touchscreen-based interfaces. Across workshops, it was clear that these should be carefully considered to meet people at their abilities, with examples of smartwatches on the user's wrist or touchscreens that can move to meet the person, rather than requiring someone to reach for a screen. Thirdly, the workshops revealed a need for robots to clear the sidewalk and make it more accessible for PwMD such as by communicating with other technologies like cars to have them avoid PwMD or by clearing the sidewalk of obstacles.

Overall, these examples suggest opportunities for robots that work on behalf of PwMD rather than simply getting out of the

way of people. While each design concept might suggest specific technical requirements for future public robots, we acknowledge that our results represent only four groups who all ended up having fairly different design ideas. In lieu of providing specific recommendations, we believe that further co-design sessions among people with disabilities and roboticists can reveal even more opportunities for supportive public robots and that designs addressing the specific use cases and contexts are needed. Based on our sessions, two areas for future exploration include robots that operate on sidewalks that can communicate with other road agents (as suggested in the crosswalk robot) and robots that can clear debris from a walkway, making it more accessible to others (as suggested by the snowplow robot). Further, robots aimed at carrying goods might consider how their service could be used for people carrying their own items rather than receiving a delivery. Finally, all designs suggested clear communication between the robot and people, however, communication modalities should be tested with a diverse set of users and should likely be multimodal to accommodate multiple communication abilities and preferences. Overall, we believe HRI practitioners leveraging similar co-design methods can uncover new technical requirements for improving accessibility using public robots.

7 DISCUSSION

Our work explores PwMD's perception of sidewalk robots, revealing inaccessible features and interaction design (RQ1). We also delve into the practice of roboticists, understanding some barriers and opportunities for them to improve accessibility in robot design (RQ2). By bringing PwMD and roboticists together to co-design

Table 4: Overview of User Needs and Interactions for Four Different Robotics Workshops
Workshop 1: Cargo Carrier Robot Needs

Functionalities	Interactions
<ul style="list-style-type: none"> • Carry heavy cargo for users who may lack the ability to do so themselves. • Self-park to avoid obstructing paths when the user enters an area where it cannot maneuver, such as near a steep ramp. • Adjustable height to accommodate people using mobility aids, allowing use by those in non-normative height ranges. 	<ul style="list-style-type: none"> • Limited control access for other sidewalk users to move it out of the way when it is unaccompanied. • Users should be able to command the robot via voice to prevent physical strain. • Smartwatch control option for users, like Lily, cannot use a phone while moving, to facilitate use when standing, especially when voice recognition is unreliable.

Workshop 2: Grocery Fetcher Robot Needs

Functionalities	Interactions
<ul style="list-style-type: none"> • Pick heavy and high-placed items using a robotic arm to assist people with limited hand dexterity and wheelchair users. • Integrate the body of robots into shopping carts instead of having independent ground to not take extra space (Refer to Fig. 6). • Accompany users consistently so that they don't need to request human assistance when none is available. 	<ul style="list-style-type: none"> • Understand natural language when users are seeking items for flexibility but also provide a touchpad for communication when users might be hesitant to speak out loud. • Robot should be courteous and explicit about each action it takes, so users can follow. • Indicate the items on the screen to confirm with users that it understands the needs.

Workshop 3: Crosswalk Guide Robot Needs

Functionalities	Interactions
<ul style="list-style-type: none"> • Alert and halt cars if they don't stop while a wheelchair is crossing the road. • Accompany wheelchair users across the road after pressing a button at the street corner. • Collect crossroad information, such as accidents and send the information to the wheelchair users' phone. 	<ul style="list-style-type: none"> • Indicate the traffic situation using both traffic light and alert sound to accommodate people with visual impairments. • Store emergency equipment which can be accessed by pressing an emergency button.

Workshop 4: Snow Plow Robot Needs

Functionalities	Interactions
<ul style="list-style-type: none"> • Plow snow and spread salt to make the sidewalk safer in winter. • Pull wheelchair users out when they are stuck in the snow. • Operate during low human activity periods to avoid obstruction due to its large size. 	<ul style="list-style-type: none"> • Enhanced visibility in the snow through standout colors, red lights, and beep sounds (Refer Fig.7). • Emergency button to move the robot and contact operators if it gets stuck or runs out of battery.

future public robots, we learn about potential accessibility needs for future robots (RQ3). Below, we discuss the implications of our work and place it in a broader context.

7.1 Learning from Interviews and Co-Design for More Holistic Public Robots Research Methods

Inspired by prior qualitative-based HRI studies [12, 13, 75], we leveraged semi-structured interviews and co-design workshops to study

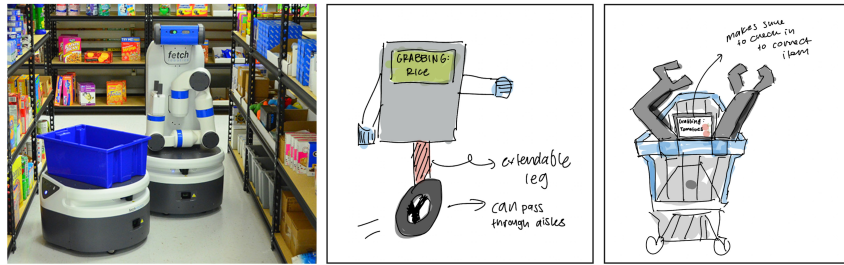


Figure 6: For the grocery fetcher robot, Michael, initially referred to an existing robot product—Fetcher (left image), however, Adrienne argued the base should be narrower to not block ways (middle image). They then decided to utilize the shopping carts as the mobile base (right image).

two sets of stakeholder perspectives concerning emerging public robots, as well as collaborations between them. In our co-design workshop, we intentionally invited robotic practitioners from diverse backgrounds, from design and engineering to industry and academia. We found that their backgrounds and expertise influence their views and, in turn, the co-design outcomes. For instance, a roboticist with extensive experience in proxemics frequently raised questions regarding how wheelchair users navigate robots in public spaces. We interpreted this in two ways: firstly, it shows the opportunity space of incorporating accessibility in different facets of HRI; secondly, future studies should be more mindful of balancing the professional participants to avoid the outcome being over-directed by the participant’s personal experience. We recommend future studies adopting iterative and long-term co-design sessions [56] to facilitate reflective design processes. This can be effective in providing a more comprehensive lens on the accessible feature and also improve the achievability.

Through interviews with PwMD, we learned of potential conflict scenarios between PwMD and the robots (refer to Section 4.1.1) influenced by a range of HRI design factors (refer to Section 4.1.4). Building on these scenarios, future work could concentrate on refining the interaction design of sidewalk robots [37], accommodating the multifaceted requirements of PwMD [18, 48], and taking into account diverse robotic design dimensions such as anthropomorphism [9] and non-verbal signals [10, 28] [47, 49, 65], [18, 24, 48, 69]. Nonetheless, there remains a pressing need to test these interactions and qualitative findings in real-world evaluations. For instance, as

discussed in Section 4.2.2, our interviews suggested PwMD have a preference for voice interaction, valuing both its inherent naturalness and avoiding direct, tactile engagements while navigating the street. In contrast to our findings, some literature suggests a general expectation that robots remain non-vocal [72], and that the willingness of individuals to instigate conversations with robots might be minimal [38, 81]. Yet, in scenarios laden with potential conflicts, such as robots obstructing vital sidewalk resources, lacking different forms of interaction, including speech, could lead to issues. Consequently, to truly cultivate an interaction paradigm that is both usable and societally acceptable, it is imperative to delve deeper into the disparities between PwMD’s anticipated and actual responses to robots in public via comprehensive contextual evaluations and observations [32, 80].

7.2 Inclusive Stakeholder Engagement: A Prerequisite for the Ethical Design of Public Service Robots

Our interview findings explored opportunities to make public robots more accessible, such as adapting to their mobility aids (Section 4.1.3), enhancing regulations to move beyond physical size and speed to consider robot behaviors (Section 5.3), and providing mechanisms to address robot malfunctions (Section 4.3). However, we need to be more cautious about techno-capitalism: there is a risk that robot companies might leverage these enhancements to assert the accessibility of their robots, which contributes to rationalizing the deployments. Indeed, certain segments of the disabled community have already voiced reservations concerning private-owned delivery robots taking up space on the public sidewalk [12].

So, what are the ways that accessible robots can enhance the accessibility of public space? PwMD in the workshops suggested that the robots could enhance their daily living, including improving their carrying capabilities and alleviating transportation anxieties (Section 6.1). They also collaborated with roboticists, making design decisions that led to accessible features such as adjustable robots and examining the value of the robots within their technical viability (Section 6.2). The accessible features they raised might also challenge current robot capacities and roboticist’s conception of universal design (Section 6.1). Such co-design engagements may offer a chance for roboticists to learn more about accessibility and

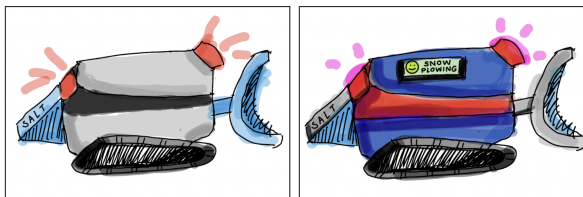


Figure 7: An illustrator sketched the first version of the snow plow robots (left image) based on Will’s description. Afterward, Emma and Will found the flaws of robots not being visible in the snow and thus changed the color and proposed adding indicative lights (right image).

reflect on their practices. Thus, to ensure accessibility, it is imperative to engage PwMD both in the evaluation of robot designs and early ideation of robot features and interaction.

We also recognize that solely focusing on people with mobility impairments is insufficient, and may pose a challenge to the generalizability of our findings. For example, in the conflict scenarios discussed in Section 4.1, interviewees highlighted design factors that led to a sense of competition for the curb cut, a resource indispensable to PwMD. However, people with visual impairments may have different perceptions of robot behavior than those seen as obstructive by PwMD. Therefore, design suggestions such as voice interaction may be invalid or even unfavorable to them. Even though the findings presented here are specific to the populations with whom we engaged, our interview design (ref to Section 3.2) is generalizable as it effectively introduced the concept of public robots, different design factors, scenarios of encountering the robots, and a comprehensive set of interaction modalities. All of our PwMD participants were able to comment on the robot even without prior exposure. Thus, future research can reuse and adapt our interview and co-design methods to engage other groups to compare and extend our findings on accessible public robot design.

Moreover, findings from our engagements with robot practitioners suggest collaborations with other parties, such as policymakers and urban planners, are also necessary to realizing the vision of accessible robot design (refer to Section 5.1). The idea of broader engagement beyond practitioners and everyday people echoes recent HRI studies on ethical congruent operations [57, 82], which prompts vital inquiries such as “*Who gets to be included in the robot design process?*” [57]. We argue that future robot design should include multi-stakeholder engagements through co-design workshops with appropriately designed participation frameworks [85, 86] that enable such collaboration.

7.3 Enhancing Standards, Policies, and Regulations for the Development of Accessible Public Robots

Accessibility in robot design and development remains insufficient, even as sidewalk robots are increasingly deployed in public spaces. Prior approaches to ensuring accessibility found in desktop computing accessibility may offer promising opportunities for benchmarking [76], scaffolding [23], and validating [50] robotic accessibility. Another needed aspect is the development of overarching design frameworks for sidewalk robots that include accessibility recommendations [2]; this is also paramount to nurturing a culture of accessibility amongst roboticists (as described in Section 7.2). This will take time and as noted in Section 5.3 the lack of overarching design frameworks can be a challenge, especially for start-ups who potentially lack the awareness, bandwidth, and resources to emphasize access in design and development. As such, we saw robotic practitioners advocate for enhanced guidelines and regulations to promote accessibility.

Proactive public policy can do much to ensure that society reaps the greatest benefits from new technology while reducing possible harms [17]. Our qualitative data from PwMD reveal that current regulations concerning sidewalk robots may be overly broad and,

in some cases, excessively prescriptive. For instance, PwMD’s perception of the robot as lacking communication and other necessary interaction functionalities to fully adapt to the complexities of the sidewalk (refer to Section 4.1.1) can challenge the sidewalk robot’s current classification as a “pedestrian.” Some robotic behaviors such as inadvertently blocking access or malfunctions could also violate U.S. mandates that require public sidewalks and services to be universally accessible [1]. Thus, beyond simply defining the maximum weight, size, and speeds of the robot [4], we argue future public robot regulations should go further and more comprehensively attend to the interactions and effects—intended or unintended—of sidewalk robots to ensure accessibility for all.

Additionally, the synergistic relationship between public robotic policies and urban planning remains under-explored. The rise of public robots could radically reshape the distribution, utilization, and dynamics of urban spaces. We have seen recent smart city practices start to consider establishing a dedicated line on the sidewalk for mobile robots to operate [79]—our robotic practitioner interviewees also mentioned similar ideas (refer to Section 5.3). However, from an accessibility lens, salient questions arise: Will reallocating public space to robots exacerbate existing accessibility constraints on public sidewalks? To what extent can accessibility challenges be alleviated? And, fundamentally, should urban planning cater to robots, or should robot designs adapt to current urban environments?

8 CONCLUSION

As the use of public robots continues to grow, so does the likelihood that they will encounter people with mobility disabilities. After speaking to PwMD, we discovered that they perceive current sidewalk robot designs as inaccessible. Furthermore, the roboticists that we spoke with suggested that such challenges could only be solved with early and deep participation of PwMD, which current robotic practice may fail to do due to resource constraints and a problematic mindset of patching accessibility only after the issues and harms have unfolded in real-world encounters. By pairing PwMD and roboticists in co-design workshops, we observed how they navigated the development of public robots together in a way where accessibility is centered and the public good is prioritized. Our participants collectively designed accessible features such as fetching groceries and managing car flows. The process also revealed some of the challenges found in such collaboration and in balancing accessibility with other aspects of technical feasibility. Connecting our findings with current robot regulations and ethical design considerations, we believe that solving robot accessibility issues will require involving broader stakeholders when designing a robot and developing better public policy and regulations for robots, robotic practitioners, and the urban space.

ACKNOWLEDGMENTS

This work was supported by the National Science Foundation under grant CNS #2125350 *Smart and Connected Communities: Planning Grant - Equitable new mobility: Community-driven mechanisms for designing and evaluating personal delivery device deployments*. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily

reflect the views of the National Science Foundation. We acknowledged all the participants for their engagements and insights. We also appreciated the valuable feedback from Henny Admoni and Laura Dabbish.

REFERENCES

- [1] [n. d.]. ADA Access to Buildings and Businesses (Public Accommodations) - Overview. <https://www.findlaw.com/civilrights/discrimination/ada-access-to-buildings-and-businesses-public-accommodations.html>.
- [2] [n. d.]. Design Principles for Robot-Assisted Feeding in Social Contexts | Proceedings of the 2023 ACM/IEEE International Conference on Human-Robot Interaction. <https://dl.acm.org/doi/10.1145/3568162.3576988>.
- [3] [n. d.]. Public Accommodations and Commercial Facilities (Title III). https://archive.ada.gov/ada_title_III.htm.
- [4] 2020. Bill Information Senate Bill 1199 Regular Session 20192020 PA General Assembly. <https://www.legis.state.pa.us/cfdocs/billInfo/BillInfo.cfm?year=2019&kind=0&body=S&type=B&bn=1199>. (undefined 2/7/2023 0:29).
- [5] 2022. Starship Technologies completes four million autonomous deliveries. <https://www.chargedetail.co.uk/2022/11/07/starship-technologies-completes-four-million-autonomous-deliveries/>. (undefined 7/7/2023 5:48).
- [6] Hassan A Karimi, M Bernardine Dias, Jonathan Pearlman, and George J Zimmerman. 2014. Wayfinding and navigation for people with disabilities using social navigation networks. *EAI Endorsed Transactions on Collaborative Computing* 1, 2 (2014), e5.
- [7] Emily Ackerman. 2019. Lessons From My Standoff With an Autonomous Sidewalk Robot. *Bloomberg. com*. Retrieved January 21 (2019), 2021.
- [8] Shiri Azenkot, Catherine Feng, and Maya Cakmak. 2016. Enabling Building Service Robots to Guide Blind People: A Participatory Design Approach. In *The Eleventh ACM/IEEE International Conference on Human Robot Interaction (Christchurch, New Zealand) (HRI '16)*. IEEE Press, 3–10.
- [9] Jun Baba, Sichao Song, Junya Nakanishi, Yuichiro Yoshikawa, and Hiroshi Ishiguro. 2021. Local vs. Avatar Robot: Performance and Perceived Workload of Service Encounters in Public Space. *Frontiers in Robotics and AI* 8 (2021).
- [10] Franziska Babel, Johannes Kraus, Linda Miller, Matthias Kraus, Nicolas Wagner, Wolfgang Minker, and Martin Baumann. 2021. Small Talk with a Robot? The Impact of Dialog Content, Talk Initiative, and Gaze Behavior of a Social Robot on Trust, Acceptance, and Proximity. *International Journal of Social Robotics* 13, 6 (Sept. 2021), 1485–1498. <https://doi.org/10.1007/s12369-020-00730-0>
- [11] C. Bartneck and J. Forlizzi. 2004. A Design-Centred Framework for Social Human-Robot Interaction. In *RO-MAN 2004. 13th IEEE International Workshop on Robot and Human Interactive Communication (IEEE Catalog No.04TH8759)*. IEEE, Kurashiki, Okayama, Japan, 591–594. <https://doi.org/10.1109/ROMAN.2004.1374827>
- [12] Cynthia Bennett, Emily Ackerman, Bonnie Fan, Jeffrey Bigham, Patrick Carrington, and Sarah Fox. 2021. Accessibility and the crowded sidewalk: Micromobility's impact on public space. In *Designing Interactive Systems Conference 2021*. 365–380.
- [13] Prajna Bhat and Yuhang Zhao. 2022. "I was Confused by It; It was Confused by Me": Exploring the Experiences of People with Visual Impairments around Mobile Service Robots. *Proceedings of the ACM on Human-Computer Interaction* 6, CSCW2 (2022), 1–26.
- [14] Raden Agoeng Bhimasta and Pei-Yi Kuo. 2019. What causes the adoption failure of service robots? A Case of Henn-na Hotel in Japan. In *Adjunct proceedings of the 2019 ACM international joint conference on pervasive and ubiquitous computing and proceedings of the 2019 ACM international symposium on wearable computers*. 1107–1112.
- [15] Fanjun Bu, Ilan Mandel, Wen-Ying Lee, and Wendy Ju. 2023. Trash Barrel Robots in the City. In *Companion of the 2023 ACM/IEEE International Conference on Human-Robot Interaction (HRI '23)*. Association for Computing Machinery, New York, NY, USA, 875–877. <https://doi.org/10.1145/3568294.3580206>
- [16] Sophie Bushwick. 2021. The NYPD's Robot Dog Was a Really Bad Idea: Here's What Went Wrong. *Scientific American* (May 2021). <https://www.scientificamerican.com/article/the-nypds-robot-dog-was-a-really-bad-idea-heres-what-went-wrong/>
- [17] Paul Cairney and Emily St Denny. 2020. *Why Isn't Government Policy More Preventive?* Oxford University Press.
- [18] Patrick Carrington, Amy Hurst, and Shaun K Kane. 2014. Wearables and chairables: inclusive design of mobile input and output techniques for power wheelchair users. In *Proceedings of the SIGCHI Conference on human factors in computing systems*. 3103–3112.
- [19] Meia Chita-Tegmark and Matthias Scheutz. 2021. Assistive Robots for the Social Management of Health: A Framework for Robot Design and Human-Robot Interaction Research. *International Journal of Social Robotics* 13, 2 (2021), 197–217. <https://doi.org/10.1007/s12369-020-00634-z>
- [20] Stef de Groot. 2019. Pedestrian Acceptance of Delivery Robots: Appearance, interaction and intelligence design. (2019).
- [21] Munjal Desai, Poornima Kaniarasu, Mikhail Medvedev, Aaron Steinfeld, and Holly Yanco. 2013. Impact of robot failures and feedback on real-time trust. In *2013 8th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 251–258.
- [22] Anna Dobrosovstnova, Isabel Schwaninger, and Astrid Weiss. 2022. With a little help of humans. an exploratory study of delivery robots stuck in snow. In *2022 31st IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*. IEEE, 1023–1029.
- [23] Frank Elavsky, Lucas Nadolskis, and Dominik Moritz. [n. d.]. Data Navigator: An Accessibility Centered Data Navigation Toolkit. ([n. d.]).
- [24] Mingming Fan, Zhen Li, and Franklin Mingzhe Li. 2021. Eyelid gestures for people with motor impairments. *Commun. ACM* 65, 1 (2021), 108–115.
- [25] Jennifer Fereday and Eimear Muir-Cochrane. 2006. Demonstrating rigor using thematic analysis: A hybrid approach of inductive and deductive coding and theme development. *International journal of qualitative methods* 5, 1 (2006), 80–92.
- [26] Ylva Farnaes, Sara Ljungblad, Mattias Jacobsson, and Alex Taylor. 2009. Where Third Wave HCI Meets HRI: Report from a Workshop on User-Centred Design of Robots. In *Proceedings of the 4th ACM/IEEE International Conference on Human Robot Interaction*. ACM, La Jolla California USA, 293–294. <https://doi.org/10.1145/1514095.1514182>
- [27] Marcos Ferreira and Suely Sanches. 2007. Proposal of a Sidewalk Accessibility Index. *Journal of Urban and Environmental Engineering* 1 (June 2007), 1–9. <https://doi.org/10.4090/juee.2007.v1n1.001009>
- [28] Leopoldina Fortunati, Filippo Cavallo, and Mauro Sarrica. 2020. Multiple Communication Roles in Human-Robot Interactions in Public Space. *International Journal of Social Robotics* 12, 4 (Aug. 2020), 931–944. <https://doi.org/10.1007/s12369-018-0509-0>
- [29] Jon E. Froehlich, Yochai Eisenberg, Maryam Hosseini, Fabio Miranda, Marc Adams, Anat Caspi, Holger Dieterich, Heather Feldner, Aldo Gonzalez, Claudina De Gyves, Joy Hammel, Reuben Kirkham, Melanie Kneisel, Delphine Labbé, Steve J. Mooney, Victor Pineda, Cláudia Pinheiro, Ana Rodríguez, Manaswi Saha, Michael Saugstad, Judy Shanley, Ather Sharif, Qing Shen, Claudio Silva, Maarten Sukel, Eric K. Tokuda, Sebastian Felix Zappe, and Anna Zivarts. 2022. The Future of Urban Accessibility for People with Disabilities: Data Collection, Analytics, Policy, and Tools. In *The 24th International ACM SIGACCESS Conference on Computers and Accessibility*. ACM, Athens Greece, 1–8. <https://doi.org/10.1145/3517428.3550402>
- [30] Steven Robert Gehrke. [n. d.]. Evaluation of Sidewalk Autonomous Delivery Robot Interactions with Pedestrians and Bicyclists. ([n. d.]), 54.
- [31] Amin Gharebaghi, Mir-Abolfazl Mostafavi, Geoffrey Edwards, Patrick Fougere, Stéphanie Gamache, and Yan Grenier. 2018. Integration of the Social Environment in a Mobility Ontology for People with Motor Disabilities. *Disability and Rehabilitation. Assistive Technology* 13, 6 (Aug. 2018), 540–551. <https://doi.org/10.1080/17483107.2017.1344887>
- [32] R. Gockley, A. Bruce, J. Forlizzi, M. Michalowski, A. Mundell, S. Rosenthal, B. Sellner, R. Simmons, K. Snipes, A.C. Schultz, and Jue Wang. 2005. Designing Robots for Long-Term Social Interaction. In *2005 IEEE/RSJ International Conference on Intelligent Robots and Systems*. 1338–1343. <https://doi.org/10.1109/IROS.2005.1545303>
- [33] Howard Han, Franklin Mingzhe Li, Nikolas Martelaro, Daragh Byrne, and Sarah E Fox. 2023. The Robot in Our Path: Investigating the Perceptions of People with Motor Disabilities on Navigating Public Space Alongside Sidewalk Robots. In *Proceedings of the 25th International ACM SIGACCESS Conference on Computers and Accessibility*. 1–6.
- [34] Markus Häring, Dieter Kuchenbrandt, and Elisabeth André. 2014. Would you like to play with me? how robots' group membership and task features influence human-robot interaction. In *Proceedings of the 2014 ACM/IEEE international conference on Human-robot interaction*. 9–16.
- [35] IBM. 2022. Accessibility features IBM Documentation. <https://www.ibm.com/docs/en/cognos-analytics/11.2.0?topic=pic-accessibility-features>. (undefined 17/8/2023 0:57).
- [36] W3C Web Accessibility Initiative (WAI). [n. d.]. WCAG 2 Overview. <https://www.w3.org/WAI/standards-guidelines/wcag/>.
- [37] Dylan Jennings and Miguel Figliozzi. 2019. Study of sidewalk autonomous delivery robots and their potential impacts on freight efficiency and travel. *Transportation Research Record* 2673, 6 (2019), 317–326.
- [38] B. Jensen, N. Tomatis, L. Mayor, A. Drygajlo, and R. Siegwart. 2005. Robots Meet Humans-interaction in Public Spaces. *IEEE Transactions on Industrial Electronics* 52, 6 (Dec. 2005), 1530–1546. <https://doi.org/10.1109/TIE.2005.858730>
- [39] Michiel Jooisse, Manja Lohse, Niels Van Berkel, Aziez Sardar, and Vanessa Evers. 2021. Making appearances: How robots should approach people. *ACM Transactions on Human-Robot Interaction (THRI)* 10, 1 (2021), 1–24.
- [40] Piyawan Kasemsupakorn and Hassan A Karimi. 2008. Data requirements and a spatial database for personalized wheelchair navigation. In *Proceedings of the 2nd international convention on rehabilitation engineering & assistive technology*. 31–34.

- [41] Piyawan Kasemsuppakorn and Hassan A Karimi. 2009. Personalised routing for wheelchair navigation. *Journal of Location Based Services* 3, 1 (2009), 24–54.
- [42] Piyawan Kasemsuppakorn, Hassan A Karimi, Dan Ding, and Manoela A Ojeda. 2015. Understanding route choices for wheelchair navigation. *Disability and Rehabilitation: Assistive Technology* 10, 3 (2015), 198–210.
- [43] Corinne E. Kirchner, Elaine G. Gerber, and Brooke C. Smith. 2008. Designed to Deter. Community Barriers to Physical Activity for People with Visual or Motor Impairments. *American Journal of Preventive Medicine* 34, 4 (April 2008), 349–352. <https://doi.org/10.1016/j.amepre.2008.01.005>
- [44] Mathis Lauckner, Fanny Kobiela, and Dietrich Manzey. 2014. ‘Hey robot, please step back!’-exploration of a spatial threshold of comfort for human-mechanoid spatial interaction in a hallway scenario. In *The 23rd IEEE International Symposium on Robot and Human Interactive Communication*. IEEE, 780–787.
- [45] Hee Rin Lee, Selma Šabanović, Wan-Ling Chang, Shinichi Nagata, Jennifer Piatt, Casey Bennett, and David Hakken. 2017. Steps Toward Participatory Design of Social Robots: Mutual Learning with Older Adults with Depression. In *Proceedings of the 2017 ACM/IEEE International Conference on Human-Robot Interaction*. ACM, Vienna Austria, 244–253. <https://doi.org/10.1145/2909824.3020237>
- [46] Min Kyung Lee, Jodi Forlizzi, Paul E Rybski, Frederick Crabbe, Wayne Chung, Josh Finkle, Eric Glaser, and Sara Kiesler. 2009. The snackbot: documenting the design of a robot for long-term human-robot interaction. In *Proceedings of the 4th ACM/IEEE international conference on Human robot interaction*. 7–14.
- [47] Franklin Mingzhe Li, Di Laura Chen, Mingming Fan, and Khai N Truong. 2021. “I Choose Assistive Devices That Save My Face” A Study on Perceptions of Accessibility and Assistive Technology Use Conducted in China. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*. 1–14.
- [48] Franklin Mingzhe Li, Michael Xieyang Liu, Yang Zhang, and Patrick Carrington. 2022. Freedom to Choose: Understanding Input Modality Preferences of People with Upper-body Motor Impairments for Activities of Daily Living. In *Proceedings of the 24th International ACM SIGACCESS Conference on Computers and Accessibility*. 1–16.
- [49] Franklin Mingzhe Li, Lotus Zhang, Maryam Bandukda, Abigale Stangl, Kristen Shinohara, Leah Findlater, and Patrick Carrington. 2023. Understanding Visual Arts Experiences of Blind People. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems*. 1–21.
- [50] Jennifer Mankoff, Holly Fait, and Tu Tran. 2005. Is your web page accessible? A comparative study of methods for assessing web page accessibility for the blind. In *Proceedings of the SIGCHI conference on Human factors in computing systems*. 41–50.
- [51] Emin Mehmet, Mehmet Baris, and Aysel Uslu. 2009. Accessibility for the Disabled People to the Built Environment in Ankara, Turkey. *African Journal of Agricultural Research* 4 (Oct. 2009), 801–814.
- [52] Allan R Meyers, Jennifer J Anderson, Donald R Miller, Kathy Shipp, and Helen Hoenig. 2002. Barriers, facilitators, and access for wheelchair users: substantive and methodologic lessons from a pilot study of environmental effects. *Social science & medicine* 55, 8 (2002), 1435–1446.
- [53] Christopher Mitchell. 2006. Pedestrian Mobility and Safety: A Key to Independence for Older People. *Topics in Geriatric Rehabilitation* 22 (Jan. 2006), 45–52. <https://doi.org/10.1097/00013614-200601000-00007>
- [54] Kazuki Mizumaru, Satoru Satake, Takayuki Kanda, and Tetsuo Ono. 2019. Stop doing it! Approaching strategy for a robot to admonish pedestrians. In *2019 14th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 449–457.
- [55] Bilge Mutlu and Jodi Forlizzi. 2008. Robots in organizations: the role of workflow, social, and environmental factors in human-robot interaction. In *Proceedings of the 3rd ACM/IEEE international conference on Human robot interaction*. 287–294.
- [56] Anastasia K Ostrowski, Cynthia Breazeal, and Hae Won Park. 2021. Long-term co-design guidelines: empowering older adults as co-designers of social robots. In *2021 30th IEEE International Conference on Robot & Human Interactive Communication (RO-MAN)*. IEEE, 1165–1172.
- [57] Anastasia K. Ostrowski, Raechel Walker, Madhurima Das, Maria Yang, Cynthia Breazeal, Hae Won Park, and Aditi Verma. 2022. Ethics, Equity, & Justice in Human-Robot Interaction: A Review and Future Directions. In *2022 31st IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*. 969–976. <https://doi.org/10.1109/RO-MAN53752.2022.9900805>
- [58] Malak Qbilat, Ana Iglesias, and Tony Belpaeme. 2021. A Proposal of Accessibility Guidelines for Human-Robot Interaction. *Electronics* 10, 5 (Jan. 2021), 561. <https://doi.org/10.3390/electronics10050561>
- [59] Malak Qbilat, Ana Iglesias, and Tony Belpaeme. 2021. A proposal of accessibility guidelines for human-robot interaction. *Electronics* 10, 5 (2021), 561.
- [60] Astrid Rosenthal-von der Pütten, David Sirkin, Anna Abrams, and Laura Platte. 2020. The forgotten in HRI: Incidental encounters with robots in public spaces. In *Companion of the 2020 ACM/IEEE International Conference on Human-Robot Interaction*. 656–657.
- [61] Manaswi Saha, Michael Saugstad, Hanuma Teja Maddali, Aileen Zeng, Ryan Holland, Steven Bower, Aditya Dash, Sage Chen, Anthony Li, Kotaro Hara, and Jon Froehlich. 2019. Project Sidewalk: A Web-based Crowdsourcing Tool for Collecting Sidewalk Accessibility Data At Scale. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems*. ACM, Glasgow Scotland UK, 1–14. <https://doi.org/10.1145/3290605.3300292>
- [62] Pericle Salvini, Diego Paez-Granados, and Aude Billard. 2022. Safety Concerns Emerging from Robots Navigating in Crowded Pedestrian Areas. *International Journal of Social Robotics* 14, 2 (March 2022), 441–462. <https://doi.org/10.1007/s12369-021-00796-4>
- [63] SM Bhagya P Samarakoon, MA Viraj J Muthugala, and AG Buddhika P Jayasekara. 2022. A Review on Human–Robot Proxemics. *Electronics* 11, 16 (2022), 2490.
- [64] Sebastian Schneider, Yuyi Liu, Kanako Tomita, and Takayuki Kanda. 2022. Stop Ignoring Me! On Fighting the Trivialization of Social Robots in Public Spaces. *J. Hum.-Robot Interact.* 11, 2, Article 11 (feb 2022), 23 pages. <https://doi.org/10.1145/3488241>
- [65] Kristen Shinohara and Jacob O Wobbrock. 2011. In the shadow of misperception: assistive technology use and social interactions. In *Proceedings of the SIGCHI conference on human factors in computing systems*. 705–714.
- [66] Emrah Akin Sisbot, Luis F Marin, Rachid Alami, and Thierry Simeon. 2006. A mobile robot that performs human acceptable motions. In *2006 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 1811–1816.
- [67] Matthew Story, Phil Webb, Sarah R Fletcher, Gilbert Tang, Cyril Jaksic, and Jon Carberry. 2022. Do speed and proximity affect human-robot collaboration with an industrial robot arm? *International Journal of Social Robotics* 14, 4 (2022), 1087–1102.
- [68] Shanti Sumartojo, Robert Lundberg, Leimin Tian, Pamela Carreno-Medrano, Dana Kulić, and Michael Mintrom. 2021. Imagining public space robots of the near-future. *Geoforum* 124 (2021), 99–109.
- [69] Wei Sun, Franklin Mingzhe Li, Benjamin Steeper, Songlin Xu, Feng Tian, and Cheng Zhang. 2021. Teethap: Recognizing discrete teeth gestures using motion and acoustic sensing on an earpiece. In *26th International Conference on Intelligent User Interfaces*. 161–169.
- [70] Leila Takayama and Caroline Pantofaru. 2009. Influences on proxemic behaviors in human-robot interaction. In *2009 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 5495–5502.
- [71] Kristen Thomasen. 2020. Robots, Regulation, and the Changing Nature of Public Space.
- [72] Sofia Thunberg and Tom Ziemke. 2020. Are People Ready for Social Robots in Public Spaces?. In *Companion of the 2020 ACM/IEEE International Conference on Human-Robot Interaction*. ACM, Cambridge United Kingdom, 482–484. <https://doi.org/10.1145/3371382.3378294>
- [73] Leimin Tian, Pamela Carreno-Medrano, Shanti Sumartojo, Michael Mintrom, Enrique Coronado, Gentiane Venture, and Dana Kulić. 2020. User Expectations of Robots in Public Spaces: A Co-design Methodology. In *Social Robotics (Lecture Notes in Computer Science)*, Alan R. Wagner, David Feil-Seifer, Kerstin S. Haring, Silvia Rossi, Thomas Williams, Hongsheng He, and Shuzhi Sam Ge (Eds.). Springer International Publishing, Cham, 259–270. https://doi.org/10.1007/978-3-030-62056-1_22
- [74] Michelle Toh. 2020. Singapore deploys robot ‘dog’ to encourage social distancing. *CNN Business* (May 2020). <https://www.cnn.com/2020/05/08/tech/singapore-coronavirus-social-distancing-robot-intl-hnk/index.html#:~:text=Singapore%20is%20trying%20a%20new,robot%2C%20at%20one%20local%20park.&text=Singapore%20had%20a%20model%20coronavirus%20response%2C%20then%20cases%20spiked>
- [75] Stephanie Valencia, Michal Luria, Amy Pavel, Jeffrey P. Bigham, and Henny Admoni. 2021. Co-Designing Socially Assistive Sidekicks for Motion-based AAC. In *Proceedings of the 2021 ACM/IEEE International Conference on Human-Robot Interaction*. ACM, Boulder CO USA, 24–33. <https://doi.org/10.1145/3434073.3444646>
- [76] Markel Vigo, Justin Brown, and Vivienne Conway. 2013. Benchmarking Web Accessibility Evaluation Tools: Measuring the Harm of Sole Reliance on Automated Tests. In *Proceedings of the 10th International Cross-Disciplinary Conference on Web Accessibility (W4A '13)*. Association for Computing Machinery, New York, NY, USA, 1–10. <https://doi.org/10.1145/2461121.2461124>
- [77] Eduard Fosch Villaronga et al. 2019. Robots, standards and the law: Rivalries between private standards and public policymaking for robot governance. *Computer Law & Security Review* 35, 2 (2019), 129–144.
- [78] Michael L Walters, Kerstin Dautenhahn, René Te Boekhorst, Kheng Lee Koay, Dag Sverre Syrdal, and Chrystopher L Nehaniv. 2009. An empirical framework for human-robot proxemics. *Proc of new frontiers in human-robot interaction* (2009).
- [79] Katie Warren. [n.d.]. Toyota Just Started Building a 175-Acre Smart City at the Base of Mount Fuji in Japan. Photos Offer a Glimpse of What the ‘Woven City’ Will Look Like. <https://www.businessinsider.com/toyota-city-of-the-future-japan-mt-fuji-2020-1>
- [80] David Weinberg, Healy Dwyer, Sarah E Fox, and Nikolas Martelaro. 2023. Sharing the Sidewalk: Observing Delivery Robot Interactions with Pedestrians during a Pilot in Pittsburgh, PA. *Multimodal Technologies and Interaction* 7, 5 (2023), 53.
- [81] Astrid Weiss, Judith Igelsböck, Manfred Tscheligi, Andrea Bauer, Kolja Kühnlenz, Dirk Wollherr, and Martin Buss. 2010. Robots Asking for Directions — The Willingness of Passers-by to Support Robots. In *2010 5th ACM/IEEE International*

- Conference on Human-Robot Interaction (HRI)*. 23–30. <https://doi.org/10.1109/HRI.2010.5453273>
- [82] Katie Winkle, Donald McMillan, Maria Arnelid, Katherine Harrison, Madeline Balaam, Ericka Johnson, and Iolanda Leite. 2023. Feminist Human-Robot Interaction: Disentangling Power, Principles and Practice for Better, More Ethical HRI. In *Proceedings of the 2023 ACM/IEEE International Conference on Human-Robot Interaction*. ACM, Stockholm Sweden, 72–82. <https://doi.org/10.1145/3568162.3576973>
 - [83] Anna Wojciechowska, Jeremy Frey, Sarit Sass, Roy Shafir, and Jessica R Cauchard. 2019. Collocated human-drone interaction: Methodology and approach strategy. In *2019 14th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 172–181.
 - [84] Stephen Yang, Brian Ka-Jun Mok, David Sirkin, Hillary Page Ive, Rohan Maheshwari, Kerstin Fischer, and Wendy Ju. 2015. Experiences developing socially acceptable interactions for a robotic trash barrel. In *2015 24th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. 277–284. <https://doi.org/10.1109/ROMAN.2015.7333693>
 - [85] Angie Zhang, Olympia Walker, Kaci Nguyen, Jiajun Dai, Anqing Chen, and Min Kyung Lee. 2023. Deliberating with AI: Improving Decision-Making for the Future through Participatory AI Design and Stakeholder Deliberation. *Proceedings of the ACM on Human-Computer Interaction* 7, CSCW1 (April 2023), 125:1–125:32. <https://doi.org/10.1145/3579601>
 - [86] Douglas Zytke, Pamela J. Wisniewski, Shion Guha, Eric P. S. Baumer, and Min Kyung Lee. 2022. Participatory Design of AI Systems: Opportunities and Challenges Across Diverse Users, Relationships, and Application Domains. In *CHI Conference on Human Factors in Computing Systems Extended Abstracts*. ACM, New Orleans LA USA, 1–4. <https://doi.org/10.1145/3491101.3516506>